Signal

Part of the Emergency product category

Model	Signal Emergency Downlight Non-Maintained White
Code	ASLED/3NM
Application	Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial

GENERAL INFORMATION

Input	220-240V
Wattage	1.5W
Operating Temp	0°C - 40°C
Lumens Delivered	110lm
CCT	6000-7000K
Beam Angle	110

MATERIAL INFORMATION


Main Material	Polycarbonate
Product Weight without Packaging	0.216 kg
Colour / Finish	White
Diameter	50 mm
Height	38 mm

TECHNICAL INFORMATION

Class Protection	1
Light Source	LED
SDCM (Initial Macadam)	6
CRI	70
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Power Factor	0.2
L70 @ 25°C	L70 50,000h

PRODUCT FEATURES

- Economic and compact LED Non-Maintained fixed downlight ideal for use in hotel bedrooms
- LED combines power and green charge indicator
- 3 hour emergency output
- ICEL Certified

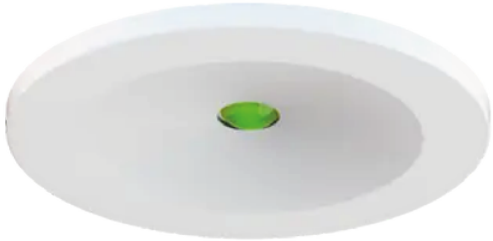

ICEL CERTIFIED
ICEL 001 - 062



Signal

Part of the Emergency product category

Model	Signal Emergency Downlight Non-Maintained White
Code	ASLED/3NM
Application	Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial

