Gamma

3YR | ZONE 2 | IP54 | IK09 | ON-SITE WARRANTY 2 YEARS

Part of the Bulkheads product category

Model	Gamma Mini CCT
Code	AMGAMLED/CCT
Application	Ancillary, Commercial, Hospitality, Residential, Retail

GENERAL INFORMATION

Input	220-240V
Wattage	10W
Operating Temp	-5°C - 35°C
Lumens Delivered	1200lm (4000K)
lm/W	115lm/W (4000K)
CCT	3000/4000K
Beam Angle	110

MATERIAL INFORMATION

Diffuser Material	Polycarbonate
Product Weight without Packaging	0.77 kg
Colour / Finish	Matt White
Diameter	250 mm

TECHNICAL INFORMATION

Class Protection	2
Light Source	LED
SDCM (Initial Macadam)	6
CRI	80
Internal / External	Internal / External
Surface / Recessed / Suspended	Ceiling, Wall
Power Factor	0.9
L70 @ 25°C	L70 B50 54,000h


PRODUCT FEATURES

- Ultra slim modern polycarbonate wall/ceiling light suitable for education, residential and ancillary applications
- Matt white finish to body and diffuser with optional chrome trim ring
- CCT selectable between 3000K and 4000K
- Rear fixing bracket and terminal housing for ease of installation
- Microwave sensor set to 15 minutes at 3 metres (non-adjustable)

ACCESSORIES

AGAMLEDBZ/CH	Gamma Chrome Trim Ring



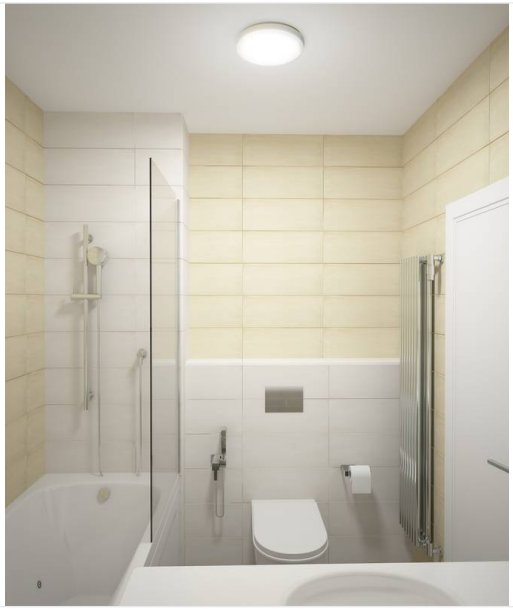

Gamma

Part of the Bulkheads product category

Model	Gamma Mini CCT
Code	AMGAMLED/CCT
Application	Ancillary, Commercial, Hospitality, Residential, Retail

