Reef

3YR IP54 IK08 ON-SITE WARRANTY 2 YEARS

Part of the Wall Lights product category

Model	Reef CCT Adjustable Surface Downlight White
Code	AREELEDA
Application	Hospitality, Outdoor, Residential, Retail

GENERAL INFORMATION

Input	220-240V
Wattage	5W
Operating Temp	-20°C - 40°C
Lumens Delivered	480lm (4000K)
lm/W	97lm/W (4000K)
CCT	3000/4000/6000K
Beam Angle	90

MATERIAL INFORMATION

Diffuser Material	Polycarbonate
Product Weight without Packaging	0.215 kg
Colour / Finish	White
Diameter	85 mm
Height	110 mm


TECHNICAL INFORMATION

Class Protection	2
Light Source	LED
SDCM (Initial Macadam)	6
CRI	80
Internal / External	Internal / External
Surface / Recessed / Suspended	Ceiling
Power Factor	0.9
L70 @ 25°C	L70 B50 54,000h

PRODUCT FEATURES

- Durable indoor/outdoor surface mounted downlight suitable for residential and hospitality applications
- Choice of matt white or black finishes
- Polycarbonate construction ideal for coastal applications
- CCT selectable between 3000K, 4000K and 6000K
- Unique lockable installation base plate with push fit loop-in loop-out terminals for ease of installation



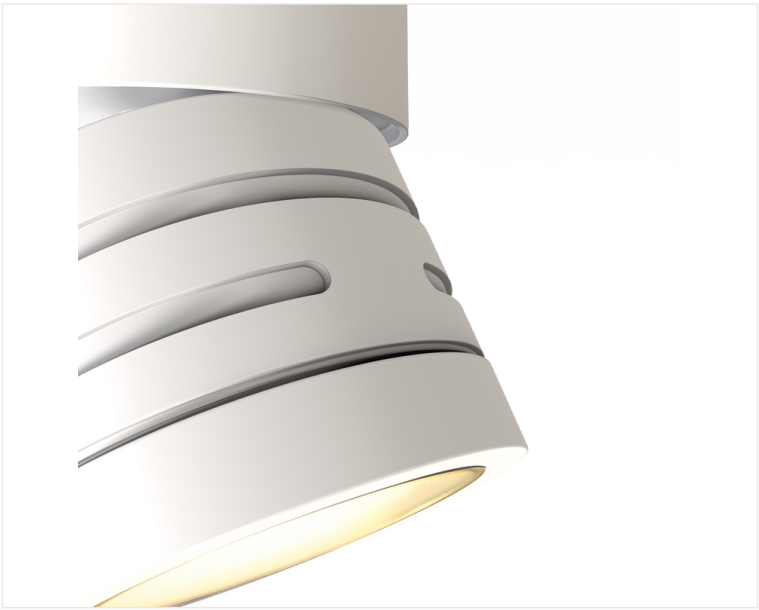

Reef

3YR IP54 IK08 ON-SITE WARRANTY 2 YEARS

Part of the Wall Lights product category

Model	Reef CCT Adjustable Surface Downlight White
Code	AREELEDA
Application	Hospitality, Outdoor, Residential, Retail

