Tornado Pro

7YR IP65 IK07 ON-SITE WARRANTY 3 YEARS

Part of the Battens and Weatherproofs product category

Model	Tornado PRO 1500mm Self-Test Emergency
Code	ATORPLED5/M3
Application	Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail

GENERAL INFORMATION

Input	220-240V
Wattage	30W
Operating Temp	0°C - 40°C
Lumens Delivered	3200lm
lm/W	111lm/W
CCT	4000K
Beam Angle	100/120

MATERIAL INFORMATION

Main Material	ABS
Diffuser Material	Polycarbonate
Product Weight without Packaging	1.93 kg
Colour / Finish	Grey
Height	70 mm

TECHNICAL INFORMATION


Class Protection	1
Light Source	LED
SDCM (Initial Macadam)	3
CRI	80
Internal / External	Internal / External
Surface / Recessed / Suspended	Ceiling, Suspended
Power Factor	0.9
L70 @ 25°C	L70 B50 54,000h

PRODUCT FEATURES

- Ultra slim IP65 LED robust non-corrosive batten ideal for industrial applications and ancillary areas
- High efficiency up to 161 Lm/W
- Unique base design caters for multiple installation methods
- Installer friendly embedded features aid accurate and fast installation for any application
- Quick release LED array / gear tray assembly provides the installer the means to faster installation / maintenance

ACCESSORIES

ATORPLED/SSKIT/TWIN	Tornado PRO 316L Stainless Steel Kit Twin

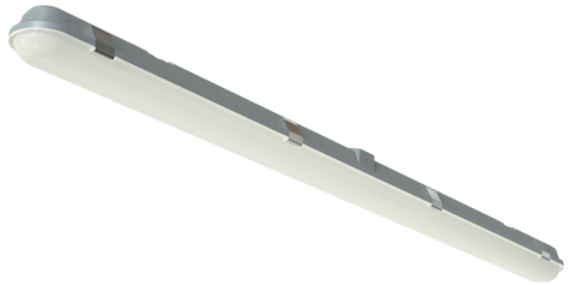



Tornado Pro

Part of the Battens and Weatherproofs product category

Model	Tornado PRO 1500mm Self-Test Emergency
Code	ATORPLED5/M3
Application	Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail

